



## Wilcoxon Research® model 786-500 General purpose low frequency accelerometer




### Features

- Rugged design
- High sensitivity
- Hermetic seal
- ESD protection
- Reverse wiring protection

### Benefits

- Clear signals at low vibration levels
- Extended low end frequency response
- Improved signal to noise ratio versus other general purpose accelerometers
- A single sensor can detect both low and high speed vibrations
- Optimized to detect vibration on slow turning machinery like cooling tower fans and slow speed gearboxes

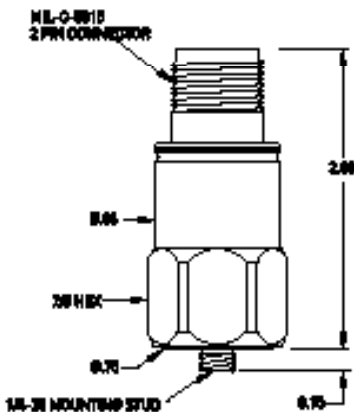

### Dynamic

Sensitivity, ± 5%, 25° C.....	500 mV/g
Acceleration range, VDC >22V .....	10 g peak
Amplitude nonlinearity.....	1%
Frequency response <sup>1</sup> :	
± 5%.....	0.7 - 5,000 Hz
± 10%.....	0.5 - 9,000 Hz
± 3 dB .....	0.2 - 14,000 Hz
Resonance frequency.....	30 kHz
Transverse sensitivity, max.....	5% of axial
Temperature response:	
-25° C.....	-10%
+120° C.....	+10%

### Electrical

Power requirement:	
Voltage source .....	18 - 30 VDC
Current regulating diode .....	2 - 10 mA
Electrical noise, equiv g <sup>1</sup> :	
Broadband 2.5 Hz to 25 kHz .....	250 µg
Spectral	
10 Hz .....	2.5 µg/√Hz
100 Hz .....	1.5 µg/√Hz
1000 Hz .....	1.5 µg/√Hz
Output impedance, max.....	300 Ω
Bias output voltage .....	12 VDC
Grounding.....	case isolated, internally shielded

### Environmental

Temperature range .....	-50 to 120° C
Vibration limit.....	500 g peak
Shock limit .....	5,000 g peak
Electromagnetic sensitivity, equiv g, max .....	70 µg/gauss
Sealing .....	hermetic
Base strain sensitivity, max .....	0.0002 g/µstrain

### Physical

Sensing element design.....	PZT, shear
Weight.....	90 g
Case material.....	316L stainless steel
Mounting .....	1/4-28 UNF tapped hole
Mating connector .....	R6 type
Recommended cabling .....	J10 / J9T2A

### Connections

Function	Connector pin
ground	shell
power / signal	A
common	B

Accessories supplied: SF6 mounting stud (metric mounting available); calibration data (level 2)  
Note: <sup>1</sup>Frequency response limits and spectral noise values are typical

Meggitt Sensing Systems  
20511 Seneca Meadows Parkway  
Germantown MD 20876  
USA

Tel: 301 330 8811  
Fax: 301 330 8873  
Email: wilcoxon@meggitt.com

www.wilcoxon.com  
www.meggitt.com

**MEGGITT**  
smart engineering for  
extreme environments  
98960 Rev.A.7 02/16

